WELLHEAD SYSTEMS INC

THE GLOBAL WELLHEAD SYSTEMS AUTHORITY™


MODEL X TWIN

DUAL PACKOFF STUFFING BOX

NEW INNOVATION FOR A CLASSIC DESIGN

For wells where pressure conditions require double packing against the polished rod. The lower packoff allows the upper packing set to be changed while the well remains under minimal pressure.

1500 PSI WORKING PRESSURE

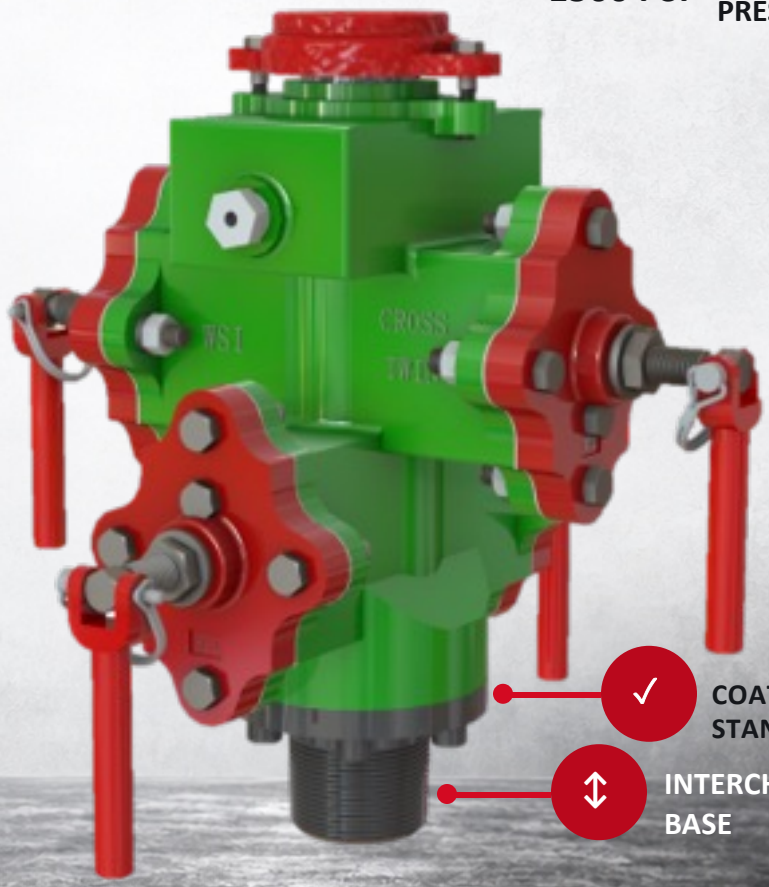

ELASTOMERIC CAP SEAL

✓ **COATED BASE STANDARD**

INTERCHANGEABLE BASE

MODEL X TWIN

1500 PSI

DOUBLE PACKING
INTERCHANGEABLE BASES
ONE BOX

MODEL X TWIN TECHNICAL OVERVIEW

1500 PSI DUAL PACKOFF STUFFING BOX

SPECIFICATIONS

- 1500 PSI working pressure rating
- Connections available in 2", 2-1/2" and 3"
- Double packing protects against polished rod leakage
- Lower packoff supports upper packing replacement under minimal pressure
- Interchangeable bottom base design
- Coated bases supplied as standard equipment

OPERATING BENEFITS

- WSI-only design lets one stuffing box accept multiple base configurations.
- Change only the bottom connection when wellhead requirements change.
- Elastomeric cap seal provides longer service life.
- Stock one box while supporting several base configurations.
- Dual packing provides a second sealing point during service.

AVAILABLE OPTIONS

- Misalignment tool available with Model X Twin
- Provides 5 degrees of correction in any direction

SERVICE NOTE

- If the lower BOP section is engaged for service, disengage it after service. Otherwise, the lower BOP may not operate properly when needed.

MODEL X TWIN CONFIGURATION

- Dual packoff stuffing box with interchangeable 2", 2-1/2" and 3" bottom connections