WELLHEAD SYSTEMS INC

THE GLOBAL WELLHEAD SYSTEMS AUTHORITY™

STUFFING BOX / BOP COMBINATION


HIGH PRESSURE. COMPACT PROFILE.

The Model J combines a stuffing box and genuine BOP in one compact unit. Pressure-balanced ram technology supports higher pressures while its compact construction reduces stack height, weight and leak paths.

17.60"

HSN SUPER DOME™ PACKING

POLISHED ROD SIZES 1¼", 1½" AND 1¾"

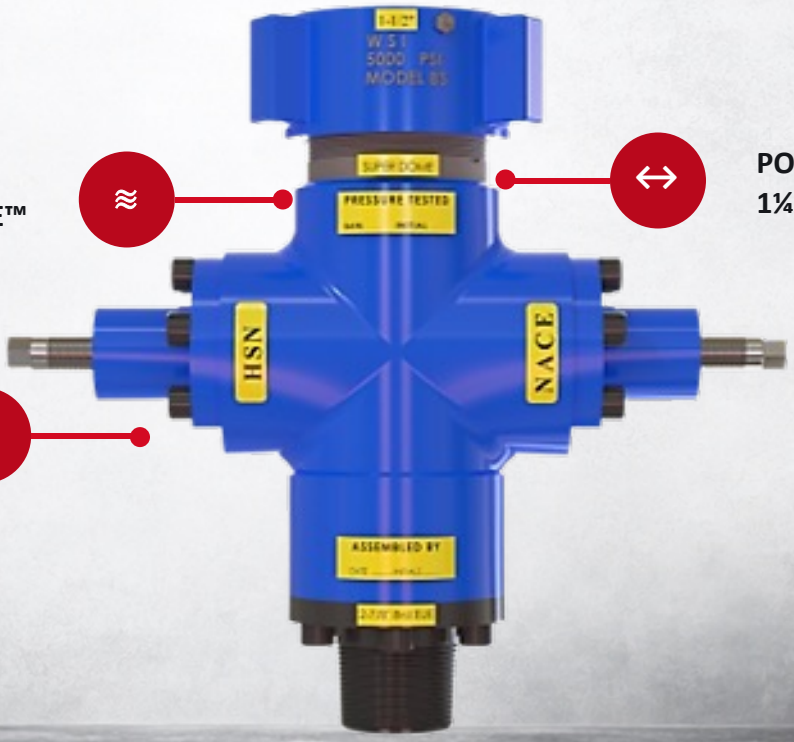

PRESSURE-BALANCED RAMS

MODEL J™

5000 PSI • MADE IN USA

LOWER STACK HEIGHT FEWER CONNECTIONS

MODEL J™ TECHNICAL OVERVIEW

5000 PSI STUFFING BOX / BOP COMBINATION

SPECIFICATIONS

- 5000 PSI rating for 2-3/8" & 2-7/8" configurations
- Meets NACE MR-01-75 requirements
- Available for 1¼", 1½" and 1¾" polished rod sizes
- Integral BOP with pressure-balanced rams
- Integral flapper valve, except with 1¾" configuration
- Interchangeable bottom base
- Enduro-Bond coated body and base
- ¼" port for a bleed valve or pressure gauge

OPERATING BENEFITS

- A single threaded cap distributes compression across the packing.
- HSN Super Dome™ packing creates a pressurized seal and improves wear life.
- Simplified packing engagement reduces replacement time and cost.
- Maximum stack-out weight is 40,000 lb.
- The unitized stuffing box and BOP reduce stack height and weight.
- Fewer connections reduce potential leak paths.
- Pairing with a 300T or 500T BOP provides dual ram protection on the well.

AVAILABLE SYSTEM OPTIONS

- BTM flange connection
- BS-ELUG & ECSS shutdown system
- Spanner wrench for the lug cap

MODEL J CONFIGURATION

- Stuffing box and genuine BOP combined in one compact assembly
- Designed for higher pressure production environments

Wellhead Systems Inc. • PO Box 129 • Hill City, KS 67642 • 866-478-2537 • MADE IN USA