
WELLHEAD SYSTEMS INC

THE GLOBAL WELLHEAD SYSTEMS AUTHORITY™

STUFFING BOX / BOP + PUMPING TEE

ONE COMPACT COMBINATION UNIT

The Model JT combines a stuffing box, genuine BOP and pumping tee in one unit. Pressure-balanced ram technology supports demanding production applications while reducing field connections and potential leak paths.

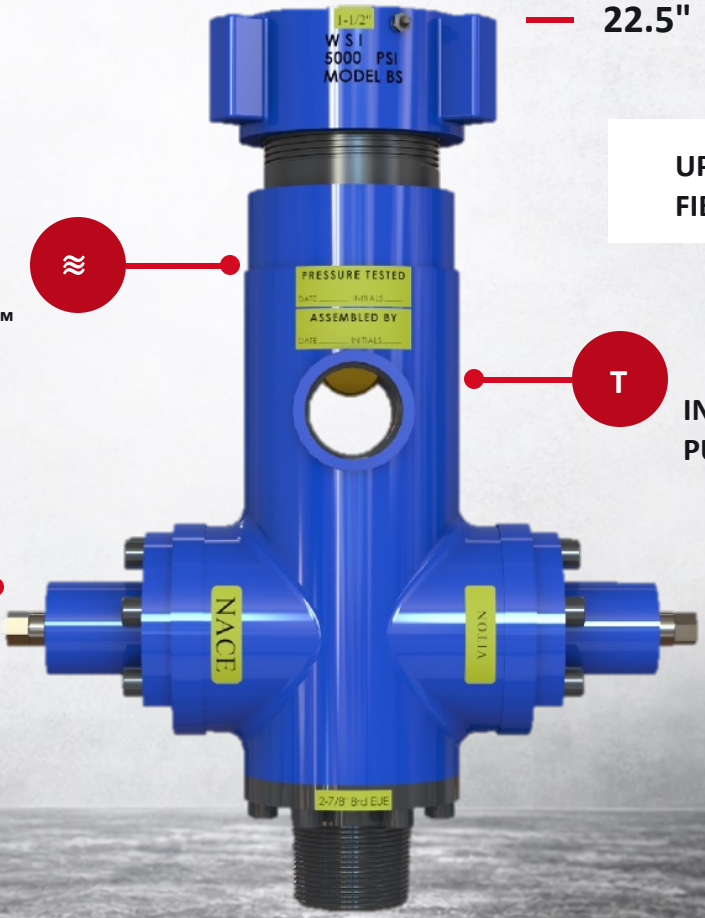

22.5"

UP TO 66% FEWER FIELD LEAK PATHS

≋ **HSN SUPER DOME™ PACKING**

T **INTEGRAL PUMPING TEE**

PB **PRESSURE-BALANCED RAMS**

MODEL JT™

5000 PSI • MADE IN USA

STUFFING BOX
BOP + PUMPING TEE
ONE UNIT

MODEL JT™ TECHNICAL OVERVIEW

5000 PSI STUFFING BOX / BOP / PUMPING TEE

SPECIFICATIONS

- 5000 PSI rating for 2-3/8", 2-7/8" and 3-1/2" configurations
- Meets NACE MR-01-75 requirements
- Available for 1¼", 1½" and 1¾" polished rod sizes
- Integral BOP with pressure-balanced rams
- Integral flapper valve, except with 1¾" polished rod
- Integral pumping tee
- Interchangeable bottom base for 2-3/8", 2-7/8" and 3-1/2"
- Enduro-Bond coated body and base
- ¼" port for a bleed valve or pressure gauge

OPERATING BENEFITS

- The combination unit reduces field leak paths by up to 66% per well.
- A single threaded cap distributes packing compression and adjustment.
- HSN Super Dome™ packing creates a pressurized seal and increases wear life.
- Simplified packing engagement reduces replacement time and cost. Use with a polished rod lubricator.
- Packing remains protected when stacking out the rod string.
- Maximum stack-out weight is 40,000 lb.
- Pairing with a 300T or 500T BOP provides dual ram protection on the well.

AVAILABLE SYSTEM OPTIONS

- BS-ELUG & ECSS shutdown system available
- Available with a BTM flange connection
- Spanner wrench for the lug cap

MODEL JT CONFIGURATION

- Stuffing box, genuine BOP and pumping tee combined in one unit
- 22.5" stack height with pressure-balanced ram technology

Wellhead Systems Inc. • PO Box 129 • Hill City, KS 67642 • 866-478-2537 • MADE IN USA