WELLHEAD SYSTEMS INC

THE GLOBAL WELLHEAD SYSTEMS AUTHORITY™

MODEL BS
STUFFING BOXES

EVEN PACKING ADJUSTMENT. REDUCED MAINTENANCE.

WSI Model BS stuffing boxes reduce the cost and effort associated with bolt adjustment, corrosion and replacement. The threaded-cap design applies even packing compression every time.

1500 / 3000 / 5000

PSI CONFIGURATIONS

BSSP




BSTB



BSDP



ADDITIONAL CONFIGURATIONS

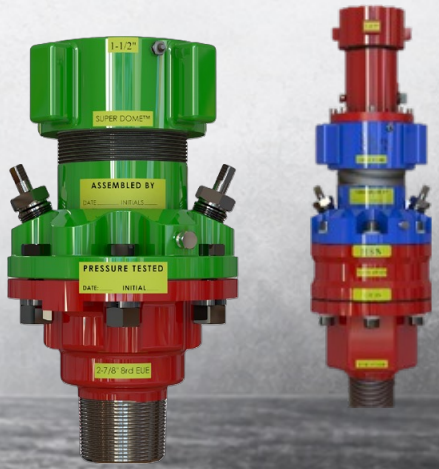

MODEL BS FAMILY

1500 / 3000 / 5000 PSI

LONGER PACKING LIFE
EVEN COMPRESSION
LOWER MAINTENANCE

WELLHEAD SYSTEMS INC

MODEL BS FAMILY

MODEL BS TECHNICAL OVERVIEW


BSSP / BSDP / BSTB / BS-ELUG

SPECIFICATIONS

- BSSP connections: 2, 2-1/2 and 3 inches
- BSDP connections: 2, 2-1/2 and 3 inches
- BSTB connections: 2-3/8 and 2-7/8 inches
- Polished rod sizes from 1 through 1-3/4 inches
- Pressure ratings: 1500, 3000 and 5000 PSI options for BSDP models
- BSDP available with a bottom flange connection

AVAILABLE OPTIONS

- Corrosion-resistant coating
- BS-ELUG and ECSS shutdown systems
- Flapper valve assembly
- Spanner wrench for lug caps

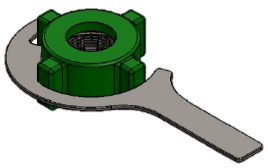

SPANNER WRENCH FOR LUG CAPS



BS-ELUG SHUTDOWN OPTION

CUSTOMER BENEFITS

- A single threaded cap distributes even packing compression and adjustment
- Inverted cone packing provides a pressurized seal and longer wear life
- The packing engagement reduces replacement time and cost

MAINTENANCE ADVANTAGES

- Protects packing when stacking out the rod string
- A brass alignment ring reduces polished rod wear
- Split rings on the top follower and alignment ring reduce maintenance time and cost

Wellhead Systems Inc. • PO Box 129 • Hill City, KS 67642 • 866-478-2537 • MADE IN USA