WSI
WELLHEAD SYSTEMS INC


THE GLOBAL WELLHEAD SYSTEMS AUTHORITY™

HEAVY-DUTY / DUAL RAM BOP

500F AND 1000F CONFIGURATIONS

10,000 PSI MAX RATING

WSI 500F and 1000F dual ram BOPs support heavy-duty applications. The series offers 5,000 and 10,000 PSI configurations with multiple flange, outlet and ram options.

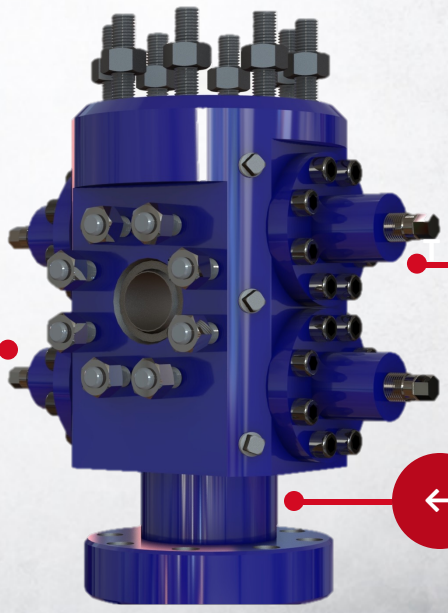

STUDDED SIDE OUTLETS

INTEGRAL TEE 500F/1000F MODEL

DUAL RAM DESIGN

STANDARD NACE

500F / 1000F

HEAVY-DUTY BOP SERIES

5,000 OR 10,000 PSI
MULTIPLE FLANGE OPTIONS
FIELD CONFIGURABLE

500F / 1000F TECHNICAL OVERVIEW

DUAL RAM BLOWOUT PREVENTER CONFIGURATIONS

500F DUAL RAM OFFSET




- 5000 PSI maximum rating
- 2-9/16" flange
- 5K top × bottom flange
- 2-1/16" studded side outlet or 2" LPO
- Blind, 1¼", 1½" and 1¾" rams
- Standard NACE

500F 7-1/16" DUAL RAM



- 5000 PSI maximum rating
- 7-1/16" flange × 2-9/16" 5K top
- 2-1/16" studded side outlet or 2" LPO
- Blind, 1¼", 1½" and 1¾" rams
- Standard NACE
- 3K, 5K or 10K flange option

1000F DUAL RAM



- 10,000 PSI maximum rating
- 2-9/16" 10M or 7" 10M bottom flange
- Integral tee with the dual ram model
- Studded side outlets only
- Blind, 1¼" and 1½" rams
- Standard NACE

CONFIGURATION SUMMARY

- 5,000 PSI & 10,000 PSI service with an integral tee and studded side outlets.

Wellhead Systems Inc. • PO Box 129 • Hill City, KS 67642 • 866-478-2537 • MADE IN USA